


# INSULATED FORK (Y) TERMINALS

## Insulated FORK (Y) terminal

### KEY FEATURES

- WIDE RANGE OF TERMINALS FOR EACH SPECIFIC USE
- METICULOUSLY DESIGNED TO ENSURE COMPLETE AND EASY INTRODUCTION OF THE CONDUCTOR STRANDS
- FOR OPTIMUM ELECTRICAL AND MECHANICAL PERFORMANCE, IT IS SUGGESTED THAT PROPER CRIMPING DIES AND TOOLS ARE USED WHICH CATER TO THEIR SPECIFIC USES/MATERIALS/FINISH
- TERMINALS ARE MADE FROM ELECTROLYTIC COPPER, ROLLED, TIN-PLATED AND BRAZED
- HIGH QUALITY NYLON INSULATION ARE USED WHICH ARE ABLE TO WITHSTAND HIGH DURESS RESULTING FROM CRIMPING\*

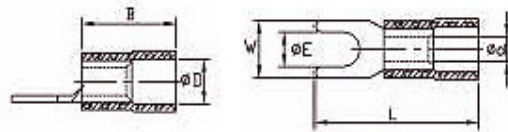

Type	WIRE RANGE			DIMENSIONS						COLOR
	mm <sup>2</sup>	AWG/MCM	mm <sup>2</sup>	ØE	ØD	Ød	W	B	L	
VF1.25-3YS	1.5	22-16	0.25-1.65	3.7	4	1.7	5.7	10.4	21.8	RED
VF1.25-3YSA				3.2	4	1.7	5.7	10.4	21.8	
VF1.25-4YS				4.3	4	1.7	6.4	10.4	21.8	
VF1.25-5Y				5.3	4	1.7	8	10.4	21.8	
VF1.25-6Y				6.7	4	1.7	10.7	10.4	21.8	
VF2-3YS	2.5	16-14	1.04-2.63	3.7	4.6	2.3	5.7	10.4	21.8	BLUE
VF2-3YSA				3.2	4.6	2.3	5.7	10.4	21.8	
VF2-4YS				4.3	4.6	2.3	6.4	10.4	21.8	
VF2-5Y				5.3	4.6	2.3	8	10.4	21.8	
VF2-6Y				6.7	4.6	2.3	10.7	10.4	21.8	
VF5.5-3Y	4-6.0	12-10	4.60-6.64	3.7	6.6	3.5	8.2	13.6	26.5	YELLOW
VF5.5-4Y				4.3	6.6	3.5	8.2	13.6	26.5	
VF5.5-5Y				5.3	6.6	3.5	9	13.6	26.5	
VF5.5-6Y				6.4	6.6	3.5	12	13.6	31.2	



ReyLuc